

a measurable difference...



Box Compression Tester – 50kN

Model: B0009

The Box Compression Tester is a floor-mounted machine designed to evaluate packages and material under compressive loads.

One platen is supplied with the machine measuring 1000 x 800 x 25mm which can be fixed or floated, as well as a base platen with the same dimensions. The Box Compression Tester uses a servo electric system to apply a precise linear motion and force.



Applications:

- Box Compression
- Stack Testing
- Multi-box Compression

Features:

- Four precision load cells are used to measure the applied force
- Precise linear transducer measures the test sample deflection.
- Strong A-frame construction.
- Motor driven ball screws, for fast and accurate operation, reposition the crosshead assembly.

Specifications:

- Maximum capacity: 50 kN
- Force Resolution: 50.00 x 0.01 x kN
- Force Accuracy: $\pm 1\%$ F.S.
- Maximum test area: D:1000mm x W:800mm x H:1200mm
- Position Repeatability: 0.2 mm
- Resolution: 2000.0
- Position measuring accuracy: 0.1 mm
- Servo Electric
- Variable Test Speed: 0.1- 250 mm/min
- Speed accuracy: 0.5% F.S.
- Crosshead Positioning: 500 mm/min
- Platen size: 1000mm x 800mm x 25mm
- Overall Height: 2312mm
- Voltage Supply: 2 x 240V AC 10 A



10-11 Colrado Court, Hallam, Victoria 3803 Australia.

Phone: +61 3 9708 6885

Fax: +61 3 9708 6770

Website: www.idminstruments.com.au

Email: idm@idminstruments.com.au

All sizes and dimensions shown on this data sheet are averages only and images are as accurate as the medium allows. Products and details shown may change without notice as IDM Instruments Pty Ltd[®] reserves the right to make alterations to its product range from time to time.

a measurable difference...




Box Compression Tester – 50kN

Computer Software:

The software used with the Box Compression Tester is the IDM Instruments Universal Tester Software, having the following specifications:

1. Data sampling is adjustable from 1-1000 Hz
2. Test parameters displayed with graph simultaneously
3. Overlay display of data curve possible during test
4. AS and ASTM Test Methods pre-programmed
5. Other test methods can be programmed by the operator
6. Calibration File to calibrate the unit
7. Position, Load or Strain rate control
8. Real time graphic display of data
9. Selectable graphical display presentation
10. Data can be read in Excel
11. Out of range alarm and stop
12. Auto return after a test is selected

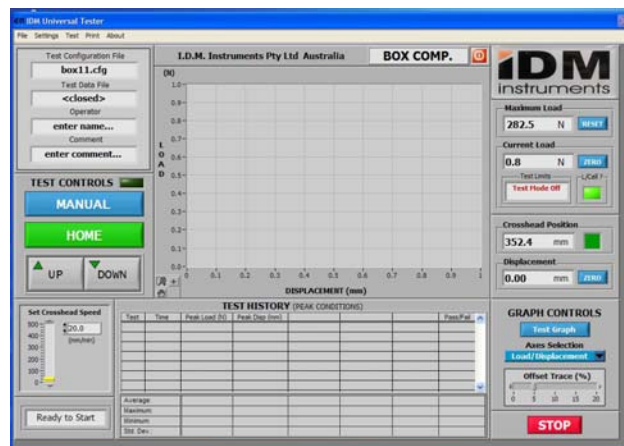

** Sample Opening Screen of Software Program

Data Output:

1. Force & Deflection
2. Digital display, peak load/position
3. Digital display & XY Graph
4. Statistical Output (on screen or print)
5. Print options: any test screen or statistics.

Auto Set Up:

1. Auto Zero
2. Preload
3. Stop
4. Position
5. Home Position

Operation:

 Automatic or Manual

1. Move force plate to loading position
2. Load Test Sample
3. Go to preset height
4. Start test with preset parameters
5. After sample collapse, return to loading
6. All data collected and operator asked to accept or reject.
7. Print: Yes/No Store: Yes/No

Standards:

- AS130-1-800s
 - ASTM D642
 - ASTM D4169
 - TAPPI T804
 - ISO 12048:1994
- * Other standards available upon request*

Connections:

- **Electrical:** 220/240 VAC @ 50 HZ
110 VAC @ 60 HZ
- (please specify when ordering)*

Dimensions:

- **H:** 2,500 mm
- **W:** 1,100mm
- **D:** 1,000mm
- **Weight:** 550 kg

10-11 Colrado Court, Hallam, Victoria 3803 Australia.

Phone: +61 3 9708 6885 Fax: +61 3 9708 6770

Website: www.idminstruments.com.au Email: idm@idminstruments.com.au

All sizes and dimensions shown on this data sheet are averages only and images are as accurate as the medium allows. Products and details shown may change without notice as IDM Instruments Pty Ltd[®] reserves the right to make alterations to its product range from time to time.