

a measurable difference...



Underwire Flex Tester

Model: G0006

The Underwire Flex Tester is used to determine the flexing durability of Underwire. By attaching each end of the Underwire to the collets and adjusting the twisting angle, the Underwire is twisted and flexed to a pre-adjusted angle for a pre-determined amount of oscillations. This aids in determining the durability of Underwire.

Application:

- Underwire

Features:

- 45 cpm
- Twist: 0° - 90° adjustable
- Counter for oscillations
- Totaliser
- Home Switch
- Collet to suit 0.6mm Underwire

Standards:

- N/A

Options:

- Extra Collets to suit different underwire sizes


Connections:

- **Electrical:** 220/240 VAC @ 50 HZ or
110 VAC @ 60 HZ

(please specify when ordering)

Dimensions:

- **H:** 300mm
- **W:** 1,200mm
- **D:** 350mm
- **Weight:** 45kg

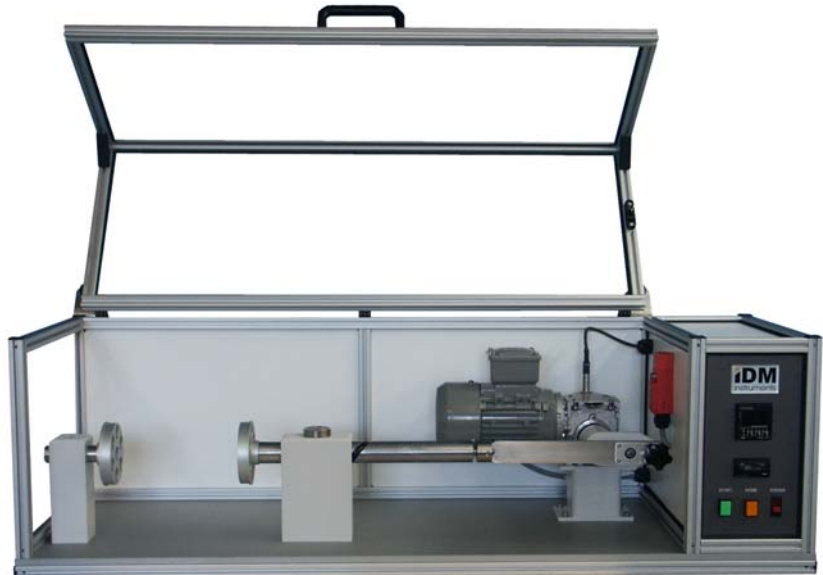

10-11 Colrado Court, Hallam, Victoria 3803 Australia.

Phone: +61 3 9708 6885 Fax: +61 3 9708 6770

Website: www.idminstruments.com.au Email: idm@idminstruments.com.au

All sizes and dimensions shown on this data sheet are averages only and images are as accurate as the medium allows. Products and details shown may change without notice as IDM Instruments Pty Ltd[®] reserves the right to make alterations to its product range from time to time.

Copyright © 2006 IDM Instruments Pty Ltd[®]. All Rights Reserved.